


Elastocoat[®] Protective Coatings Secondary Containment

Seamless protection that effectively contains spills and provides peace of mind. BASF chemistry keeps hazardous materials precisely where they're supposed to be.

performance-materials.basf.us/coatings

BENEFITS

- Monolithic
- Durability
- Toughness
- Versatility
- Corrosion protection
- Fast curing
- 100% solid/VOC free
- Abrasion resistant

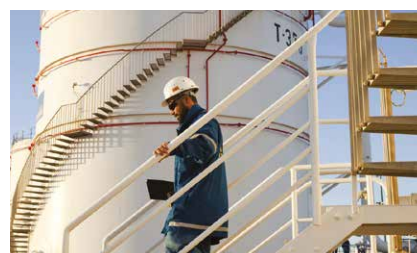

	Type	Hardness (Shore D)	Elongation (%)	Tear Strength (pli)	Abrasion Resistance	Credentials
Elastocoat 95540R NAT*	Hybrid	45	115	304	Good	NSF 61 (NAT only)
Elastocoat 95542R BLK	Hybrid	45	250	375	Excellent	
Elastocoat 95832R NAT**	Polyurea	39	150	525	Excellent	NSF 61 (NAT only)
Elastocoat 95852R NAT**	Polyurea	50	105	405	Excellent	
Elastocoat 95863R NAT**	Polyurea	60	140	405	Excellent	

*Also available in BLK, TAN, GRY

**Also available in BLK

The data contained in this document as well as advice or other support services are based on our current knowledge and experience. In view of many factors that may affect processing and application of our products, this data does not relieve processors from carrying out their own investigations and tests, particularly with regards to the suitability of the goods supplied for the processes and purposes they intend to use them for; neither does this data imply any guarantee of certain properties, or the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights, measured values etc. given herein may change without prior notice and do not constitute the agreed contractual quality of the product. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed.